




TECHNICAL SPECIFICATION & MSDS

SC1136 SILICA FABRIC

SC1136 SILICA FABRIC are woven from continuous silica yarns, have higher tensile strength than those that leached from E-glass fabric

These fabrics are applicable to all thermal insulation protection, fire and welding blankets, turbine cover, exhaust silencer cover and curtain that encountered high temperature up to 1600 °C melting points.

Silica fabrics are widely use in petrochemical, oil & gas, Chemical, shipyard, aerospace, power generation, steel, aluminum and other metals factory

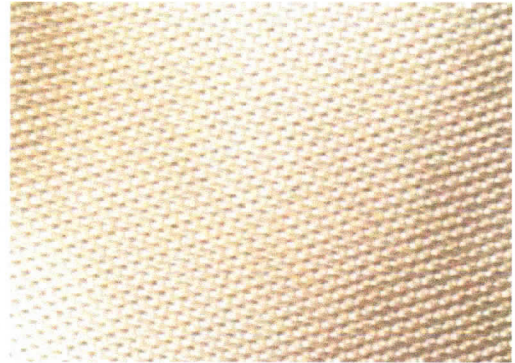

<u>Product Description</u>	<u>SC1136</u>
Thickness	1.5 (±0.2) mm
SiO2 Content	≥96 (%)
Weight	1,250 g/m ²
Warp	420N/cm
Weft	280N/cm
Length	50 m
Width	0.92 cm
Appearance color	Golden beige
Service Temp	1000°C

- Flammability : Nonflammable
- Ignitability : 0 rating
- Sprea of flame: 0 rating
- Solubility in water: Insoluble
- Personal protection: Wear safety glasses or goggles, gloves and respirator

The information contained herein is given to the best of our knowledge in good faith but no liability will be accepted by the company in relation to the same. As the company product are used for multiplicity of purposes and has no control over the matter of their application or use.

